

## 6P6C EZ Voice Modular Connector, 10 Pack

### Package Includes:

- A. RJ-11 EZ Module, 10 Pieces
- B. Wiring Cap, 10 Pieces



### Features and Benefits

- Designed for all voice connectivity applications
- Lead frame technology provides maximum performance and uninterrupted signal integrity
- Engineered to provide 110 IDC termination reducing installation time
- One piece termination cap allows for a quick and easy termination
- Includes an integrated USOC/UTP color wiring diagram
- Compatible with most IC107 faceplates, inserts, surface mount boxes, and blank patch panels.\*
- Used with ICC JackEasy™ Termination Tool ICACSPDTEH, and 110 punch down tool ICACSPDT00
- Available in Ivory and White
- ANSI/TIA-568.2-D and UL 1863 compliant
- Country of Origin: Taiwan
- TAA Compliant

#### Note:

*\*Check faceplates, inserts, surface mount boxes, bezel, or blank patch panel part for compatibility\**





Part No: IC1076VTXX

Rev: B

Page 1 of 2


icc.com | cs@icc.com





NEAR END CROSS TALK	1 MHz > 65 dB
	10 MHz > 50 dB
	16 MHz > 46 dB
	20 MHz > 44 dB
INSERTION LOSS	10 MHz > 0.008 dB
	16 MHz > 0.02 dB

## WIRING DIAGRAM

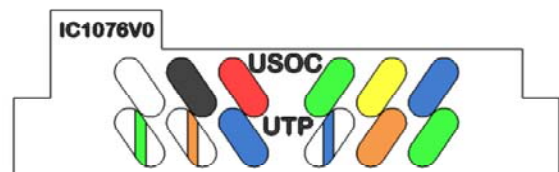

### **NOTE: UNLESS OTHERWISE SPECIFIED**

CAT RJ-11 Voice Module:

#### A. Electrical:

- I. Current Rating: 1.5 AMPS
- II. Insulation Resistance: >10 MOHMS
- III. Voltage Rating: 150 Volts Alternating
- IV. Dielectric Withstanding Voltage: 1000 Volts RMS, 60 HZ

#### B. Mechanical:

- I. Mated Force: 5 LBS Max
- II. Unmated Force: 5 LBS Max
- III. Plug Retention Force: 20 LBS Min
- IV. Durability: 750 Cycles

#### C. Physicals:

- I. Housing: High Impact, Flame Retardant Plastic, UL 94V-0
- II. Jack Wiring: Phosphor Bronze Alloy Plated with 50 µin of Gold over 70~100 µin of Nickel
- III. Connector: Insulation Displacement Connector (IDC) Accepts 22~24 AWG Solid Wire

#### D. Colors: XX: WH-White & IV-Ivory

Part No: IC1076VTXX

Rev: B

Page 2 of 2

icc.com | cs@icc.com

