
## Flat Entry 8P8C RJ-45 Plug (Stranded Wires) 100 Pack

## **Package Includes:**

A. Flat Entry 8P8C Plug, 100 PCS

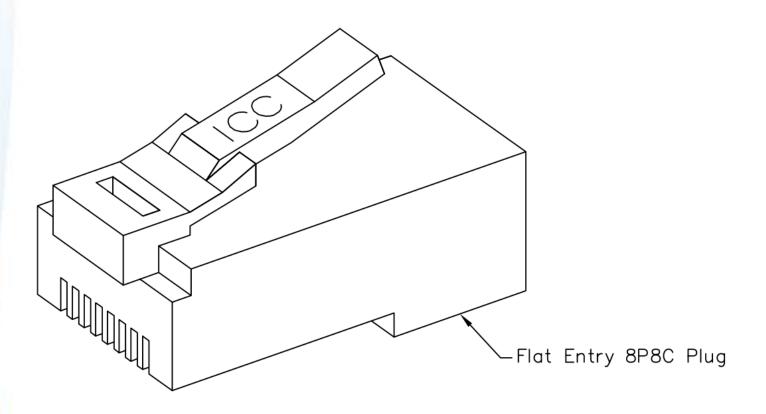

## **Features and Benefits**


- Designed for 8-position 8-conductor, stranded wires, flat line cord entry
- Ideal for customization of cords for voice or data applications
- Accepts 28-24 AWG stranded wires
- Used with ICACSCT845 and ICACSCT864 crimping tool
- UL recognized
- Country Of Origin: Taiwan
- TAA Compliant


Part No: ICMP8P8CFT Rev: A Page 1 of 2


I 888-ASK-4ICC icc.com csr@icc.com I





© Copyright 2018, ICC. This document and the designs, specifications and information contained herein are the property of ICC. Reproduction, modification, alteration or unauthorized use without ICC's approval is strictly prohibited. ICC and the ICC logo are registered trade name and trademark of ICC. All rights reserved.











## NOTE: UNLESS OTHERWISE SPECIFIED

- 1. ELECTRICAL:
  - A. UL APPLICATIONS: RATED 2A, 150V
  - B. DIELECTRIC WITHSTANDING VOLTAGE: 500 VOLTS AC
  - C. INSULATION RESISTANCE: 500 MOHMS
  - D. TERMINATION RESISTANCE: 35 MILLIOHMS MAX AFTER ENVIRONMENTAL TESTING
- 2. MECHANICAL:
  - A. CABLE-TO-PLUG TENSILE STRENGTH: 20 LBS [89N] MIN
  - B. DURABILITY: 200 MATING CYCLES
- 3. MATERIAL & FINISH:
  - A. HOUSING: PC, UL 94V-2
  - B. COLOR: CLEAR
  - C. CONTACT: HIGH STRENGTH COPPER ALLOY, GOLD PLATING OVER 100 MICRO INCH NICKEL
  - D. GOLD PLATING: 1.27 MICRON/50 MICRO INCH MIN
  - E. CONDUCTOR: 24, 26, 28 AWG STRANDED

L

Part No: ICMP8P8CFT Rev: A Page 2 of 2

888-ASK-4ICC icc.com csr@icc.com I



© Copyright 2018, ICC. This document and the designs, specifications and information contained herein are the property of ICC. Reproduction, modification, alteration or unauthorized use without ICC's approval is strictly prohibited. ICC and the ICC logo are registered trade name and trademark of ICC. All rights reserved.