
28" Plastic Net Media Center Combo with 8 Port Voice, Data & Video

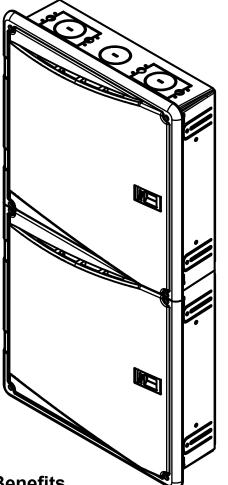

Package Includes:

- A. 28" Plastic Net Media Center, 2 Pieces
- B. Net Media Center Door, 2 Pieces
- C. Cardboard Protective Cover, 2 Pieces
- D. CAT 6 Module, Data, 8- Port , 1 Piece
- E. Telephone Module, 8-Port w/RJ31X, 1 Piece
- F. Resi Module, 2 GHz Video Splitter, 1x6, 1 Piece
- G. 6-18 x 3/4", Nickel Plated, Pan Head Phillips, Self-Tapping Screw, **8 Pieces**
- H. 10-16 x 1" Zinc Plated, Flat HeadPhillips, Wood Screw, **4 Pieces**
- I. Wiring Location Sheet, 1 Sheet
- J. Protective Cover, 1 Piece


Features and Benefits


- · Designed to serve as the central distribution point for voice, data, video, audio, and security services
- Allows for internal modules to be mounted horizontally or vertically facilitating layout and wring of systems, while providing optimum cable management.
- Works with connectivity modules with push and pull fasteners
- Snap-in system enables users to quickly insert or move internal modules
- Includes 3 Top, 3 Bottom knockouts for routing cables and 8 tie points.
- Includes a 4 knockouts for optional AC power outlets (Not included) to provide power distribution.
- Build with ABS plastic, lightweight, and sturdy
- Fits between 16" studs or can be wall mounted
- Depth mark on the enclosure simplifies adjustment for drywall depths (1/2", 5/8",3/4")
- · Enclosure combos are not designed to be installed in firewall applications
- · The screw-down doors are vented to dissipate heat and reversible to swing open left or right
- Accommodates all of ICRESXXXXX residential modules
- Used with optional accessories including ICRDSDCAC2 distribution center rubber grommets.
- Complies with ETL, TIA-568-C, TIA-570-B and TIA-607 standards

Part No: ICRESDP28K Rev: A4 Page 1 of 5


icc.com I cs@icc.com





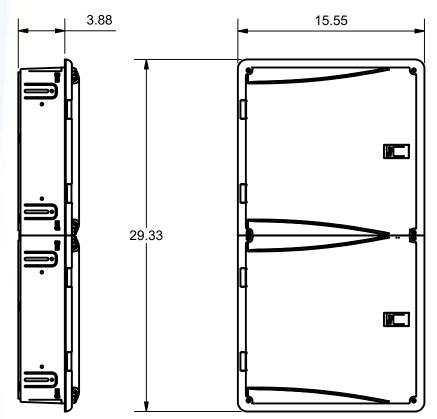






NOTE: UNLESS OTHERWISE SPECIFIED

- Material: ABS, UL 94V-0
- Color: White
- Finish: Matte

Part No: ICRESDP28K Rev: A4 Page 2 of 5

icc.com I cs@icc.com



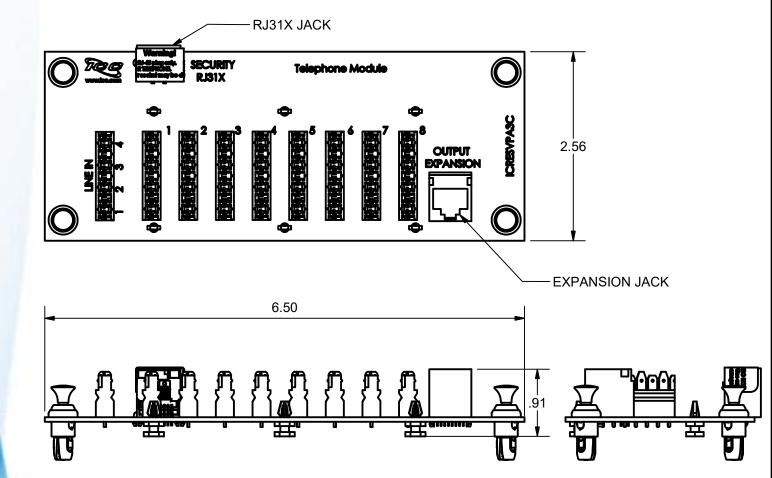


NOTE: UNLESS OTHERWISE SPECIFIED


- 1. 8- PORT TELEPHONE MODULES WITH RJ31X JACK (ICRESVPA3C):
 - A. PCB: GLASS EPOXY FR-4 COPPER CLAD,t=1.20mm
 - B. 110 BLOCK:
 - 1. HOUSING: PC, UL 94V-0
 - 2. IDC: PHOSPHOROUS BRONZE, TIN PLATED C. RJ45 & RJ31X JACK/SOCKET:
 - 1. HOUSING: PBT + 15% FIBER GLASS
 - 2. CONTACT: PHOSPHOROUS BRONZE, 50µ" GOLD PLATED
 - D. WIRING IN ACCORDANCE TO T568A
- 2. LOCKING BUTTON: MATERIAL: NYLON6/6, UL 94V-0

Part No: ICRESDP28K Rev: A4 Page 3 of 5

icc.com I cs@icc.com



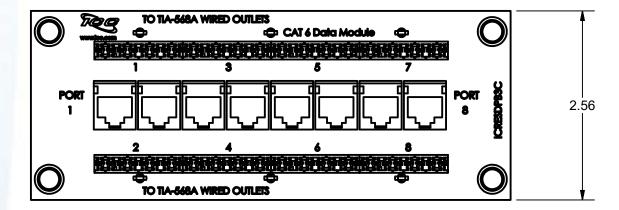

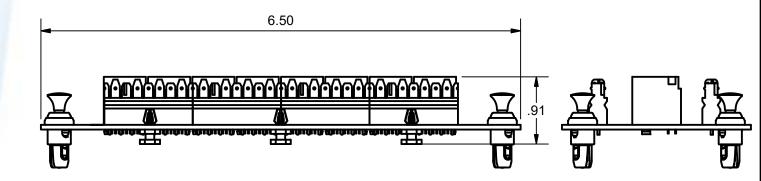

NOTE: UNLESS OTHERWISE SPECIFIED

1. 8-PORT CAT 6 DATA MODULE (ICRESDPB3C):

A. PCB: GLASS EPOXY FR-4 COPPER CLAD, t=1.20mm

- B. 110 BLOCK:
 - 1. HOUSING: PC, UL 94V-0
 - 2. IDC: PHOSPHOROUS BRONZE, TIN PLATED
- C. RJ45 JACK/SOCKET:
 - 1. HOUSING: PBT + 15% FIBER GLASS
- 2. CONTACT: PHOSPHOROUS BRONZE, $50\mu^{\prime\prime}$ GOLD PLATED D. WIRING IN ACCORDANCE TO T568A
- E. CATEGORY 6 RATED


2. LOCKING BUTTON: MATERIAL: NYLON6/6, UL 94V-0


Part No: ICRESDP28K Rev: A4 Page 4 of 5

icc.com I cs@icc.com



Product Specifications

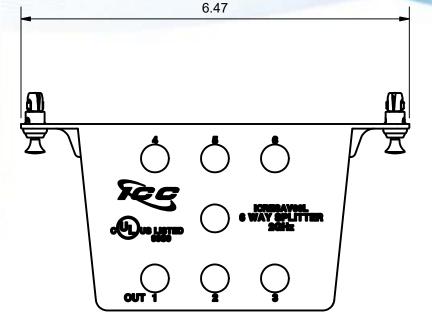

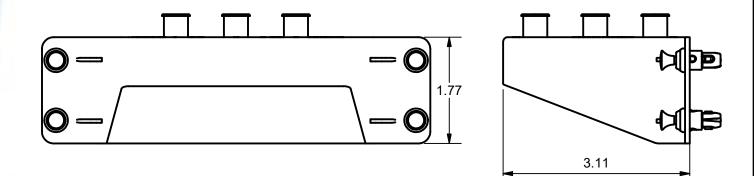

NOTE: UNLESS OTHERWISE SPECIFIED

- 1. 1X6 VIDEO SPLITTER (ICRESAV66L):
 - A. HOUSING: DIE-CASTING WITH NICKEL PLATING
 - B. CONNECTORS: F-TYPE FEMALE
 - C. FREQUENCY RANGE: 5 ~ 2300 MHZ
 - D. INSERTION LOSS: 15 dB TYPICAL
- 2. MOUNTING BRACKET:
 - A. MATERIAL: ABS PLASTIC
 - B. SURFACE FINISH: MATTE WHITE
- 3. LOCKING BUTTON:

A. MATERIAL: NYLON 6/6, UL 94V-0

Part No: ICRESDP28K Rev: A4 Page 5 of 5

icc.com I cs@icc.com

